

SOPHIA - TWIN ASSEMBLY INSTRUCTIONS:

Scan the QR code to see additional Hanging Tips on our FAQ page:






Tools Needed:




1 – Flat head screwdriver (Large)



Included:

Illustration	Part	Sophia Qty
	<p>¼" NYLON WASHER</p>	<p>18</p>
	<p>¼" X 2" SS 18-8 SIDEWALK BOLT</p>	<p>18</p>
<p>ASSEMBLY INSTRUCTIONS</p>	<p>PRINTED</p>	<p>1</p>
<p>TOUCH-UP PAINT – Ordered Color</p> 	<p>.6 OZ BOTTLE</p>	<p>1</p>

Swingbed Frame Components Included:

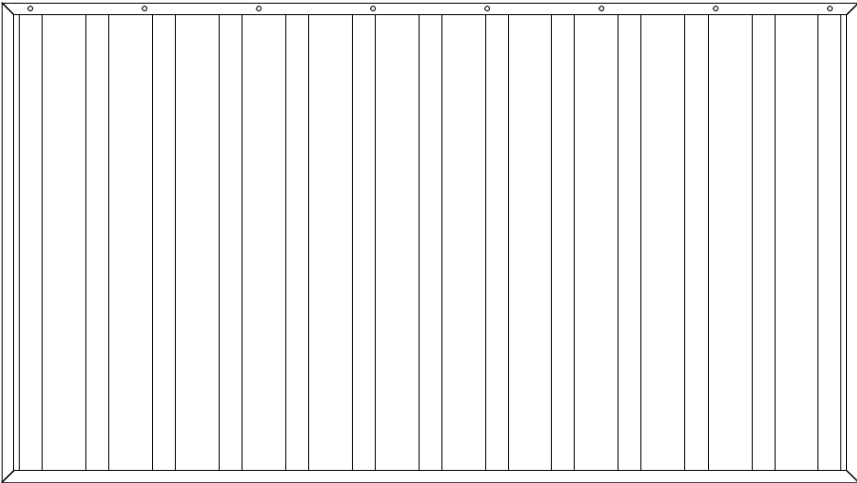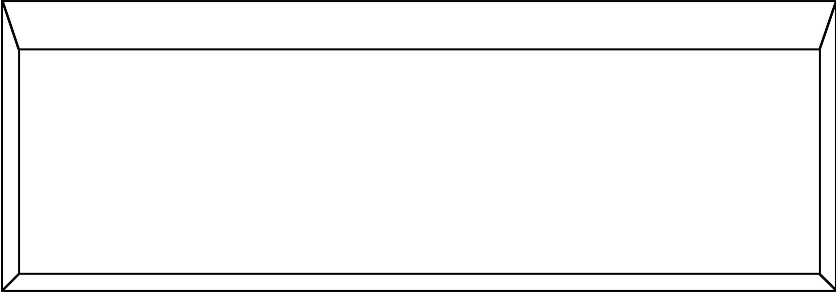Illustration	Part	Sophia - Qty
	Seat	1
	Back	1
	Side Bar	2

ASSEMBLY NOTES:

- USE 1 NYLON WASHER WITH EACH BOLT
- DO NOT OVERTIGHTEN BOLTS
- DO NOT CRUSH NYLON WASHER

STEP 1:


LAY SEAT ON A FLAT SURFACE COVERED WITH THE SHIPPING BOX (OR SOMETHING SIMILAR) TO ELIMINATE DAMAGE DURING ASSEMBLY

STEP 2:

SET BACK ON SEAT BY ALIGNING CONNECTION HOLES

STEP 3:


USING $\frac{1}{4}$ " X 2" SIDEWALK BOLTS AND WASHERS (Qty 8), **LOOSELY** SECURE THE BACK PANEL TO THE SEAT ON THE BOTTOM ONLY. FINISH UP BY TIGHTEN ALL BOLTS TO FIRMLY SECURE THE 2 PIECES TOGETHER.

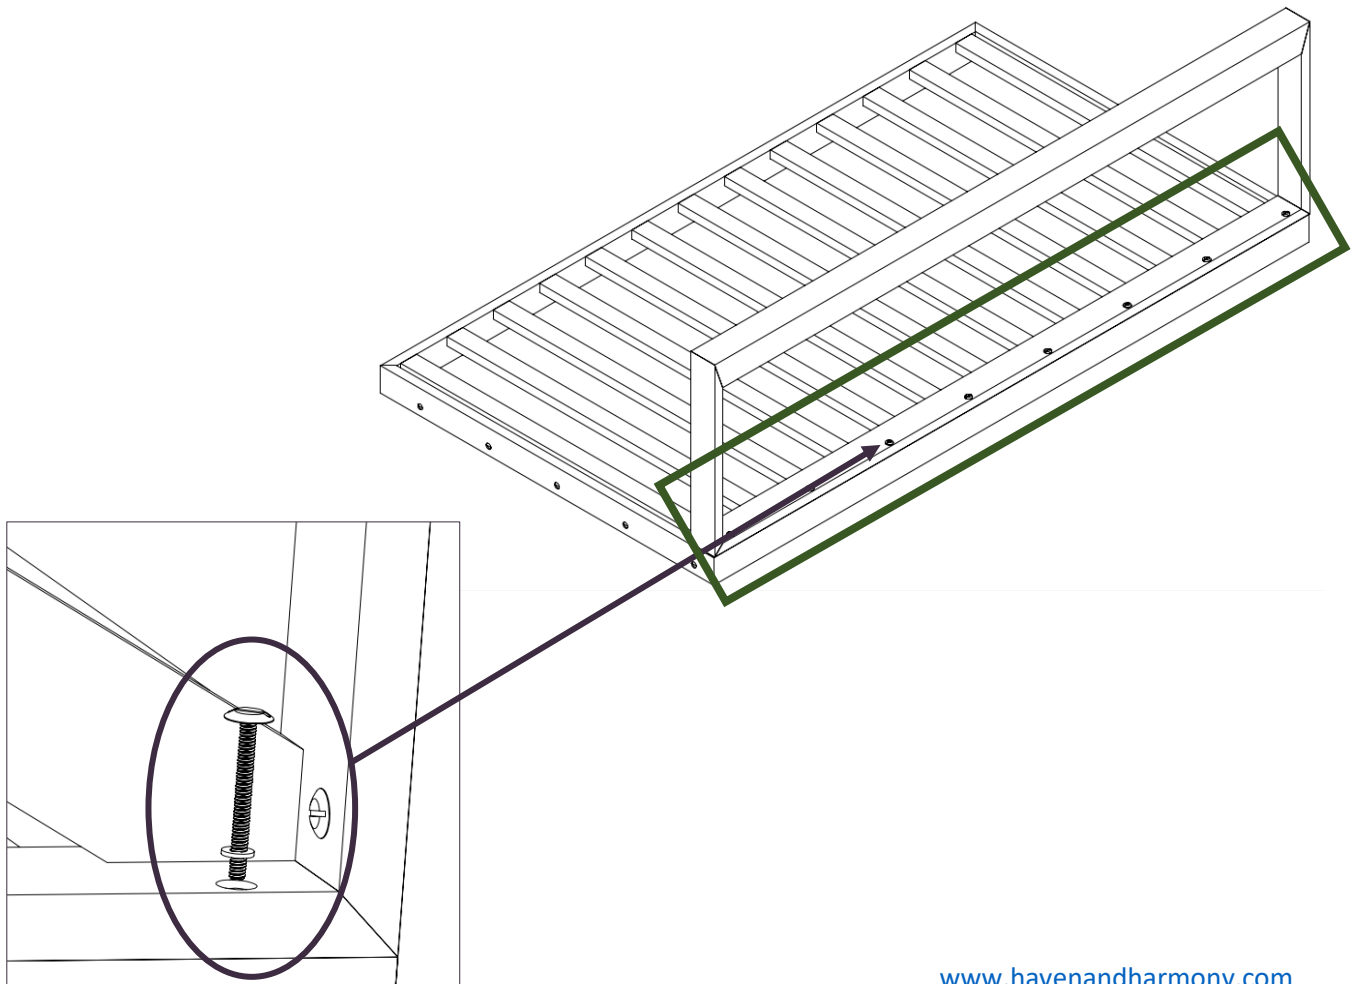

STEP 4:

LAY THE SWING ON IT'S BACK AND SECURE BOTH SIDE BARS TO THE SEAT FRAME USING 2" SIDEWALK BOLTS AND WASHERS (QTY 5 ON EACH SIDE).

NOTE: DO NOT OVERTIGHTEN BOLTS

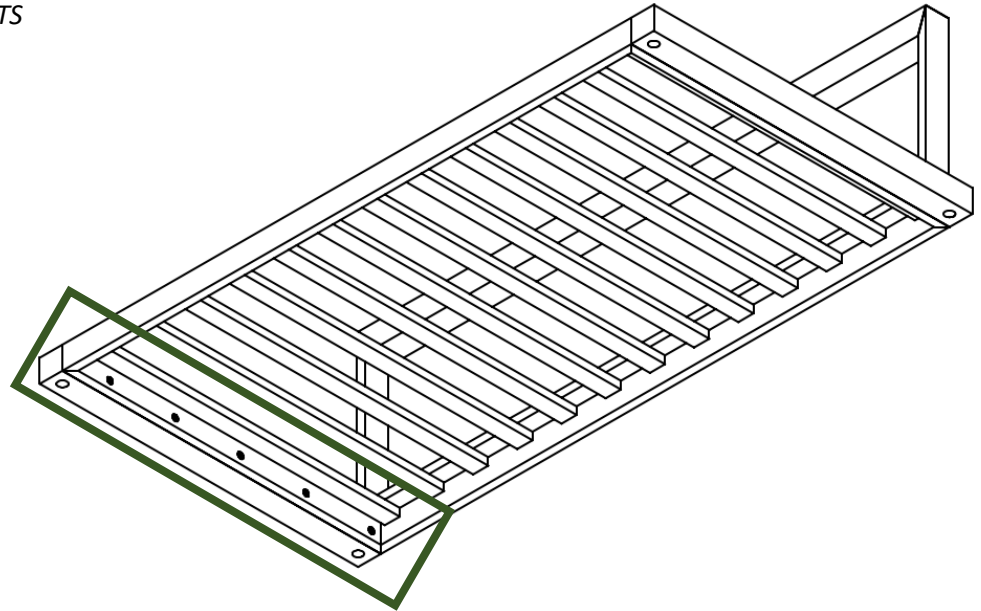

YOUR SWING IS NOW READY FOR HANGING HARDWARE AND INSTALLATION!

Let us hear from you!

support@havenandharmony.com

727.597.4142

