

recoiril®
DESIGN LINE

Awning & Marine



www.miamicorp.com



White
R099 - 60"
R09947 - 47"
R09998 - 98"



Marble
R41547 - 47"



Raw
R117 - 60"
R11747 - 47"
R11798 - 98"



Seashell
R12247 - 47"



Rye
R129 - 60"
R12947 - 47"



Cava
R11347 - 47"



Sand
R18047 - 47"



Champagne
R10747 - 47"



Wheat
R12147 - 47"



Cream
R11547 - 47"



Linen
R126 - 60"
R12647 - 47"



Beige
R100 - 60"
R10047 - 47"



Heather Beige
R139 - 60"
R13947 - 47"



Duna
R11947 - 47"



Linen Tweed
R775 - 60"
R77547 - 47"



Wine
R130 - 60"
R13047 - 47"



Brown
R156 - 60"
R15647 - 47"



Cacao
R19547 - 47"



Moonrock
R127 - 60"
R12747 - 47"



Chestnut
R104 - 60"
R10447 - 47"



Burgundy
R177 - 60"
R17747 - 47"
R17798 - 98"



Vermellon
R182 - 60"
R18247 - 47"




Red
R176 - 60"
R17647 - 47"



Red Tweed
R773 - 60"
R77347 - 47"




Salmon
R10547 - 47"

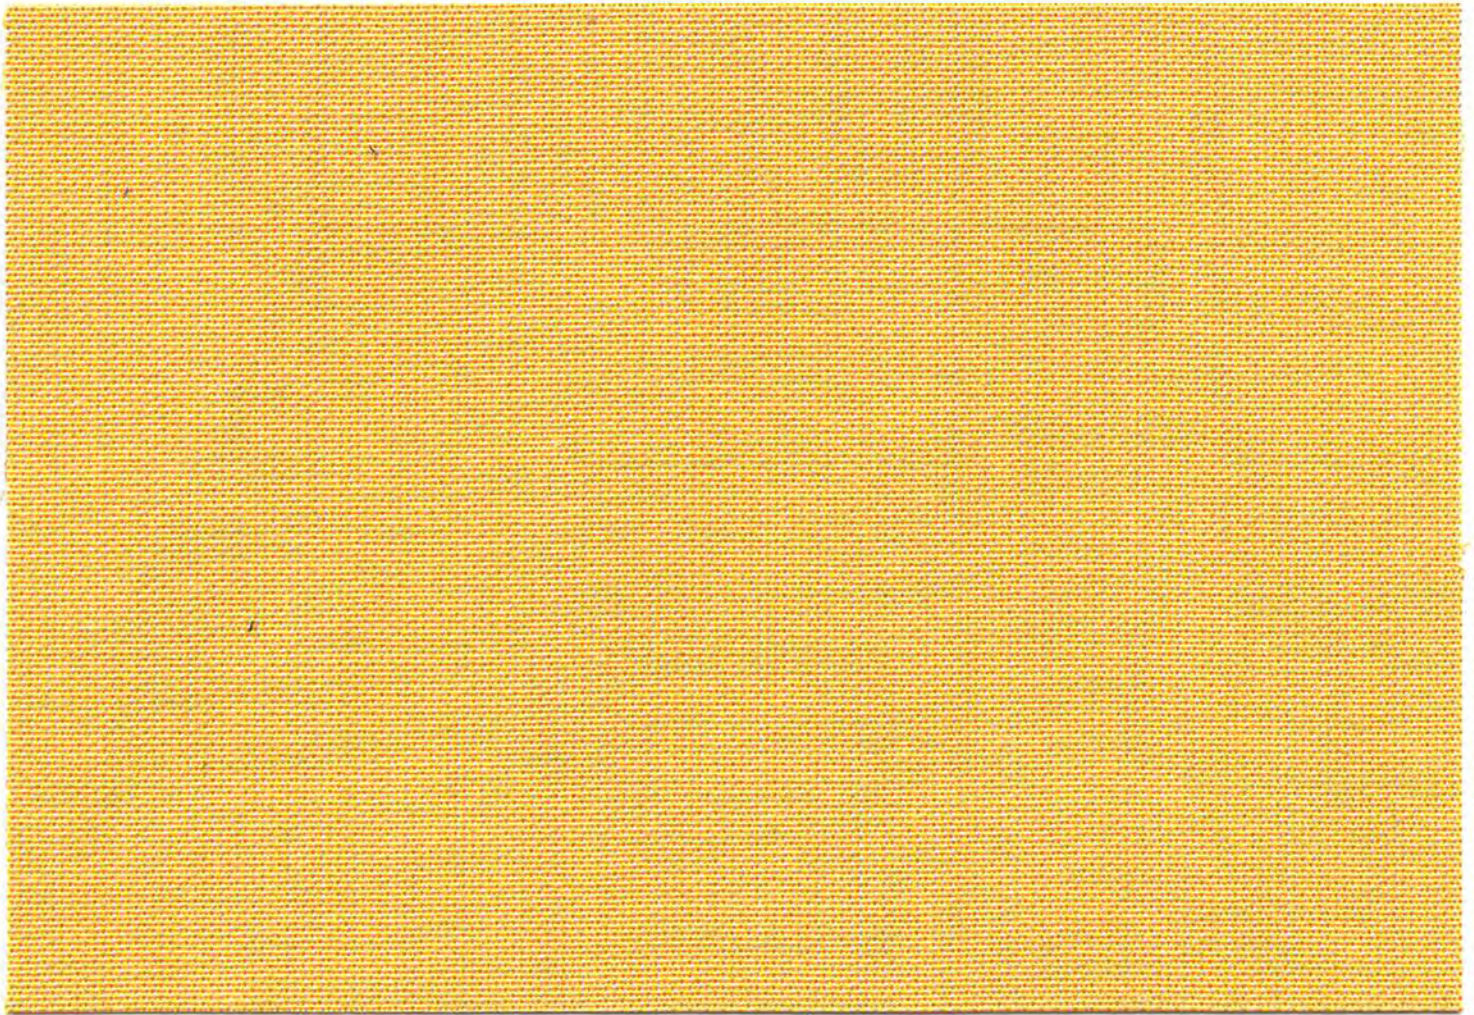

Camel
R11147 - 47"



Orange
R567 - 60"
R56747 - 47"



Mustard
R10947 - 47"



Ochre
R15847 - 47"



Vanilla
R10847 - 47"




Mandarin
R10147 - 47"



Yellow
R554 - 60"
R55447 - 47"



Flamingo
R10647 - 47"



Turquoise
R17147 - 47"



Light Blue
R19347 - 47"



Blue
R172 - 60"
R17247 - 47"
R17298 - 98"



Dark Blue
R17347 - 47"



Navy Blue
R174 - 60"
R17447 - 47"



Captain Navy
R175 - 60"
R17547 - 47"




Atlantic Blue
R199 - 60"
R19947 - 47"



Blue Tweed
R772 - 60"
R77247 - 47"



Admiral Blue
R170 - 60"



Lily
R11047 - 47"



Pistachio
R16047 - 47"



Khaki
R16247 - 47"



Green
R163 - 60"
R16347 - 47"
R16398 - 98"



Green Tweed
R771 - 60"
R77147 - 47"



Cadet Gray
R138 - 60"
R13847 - 47"



Argenta Gray
R123 - 60"
R12347 - 47"



Graphite
R11247 - 47"



Pearl
R11447 - 47"




Forest Green
R102 - 60"
R10247 - 47"
R10298 - 98"



Gray
R161 - 60"
R16147 - 47"



Charcoal Gray
R164 - 60"
R16447 - 47"



Pierrot
R118 - 60"
R11847 - 47"



Charcoal Tweed
R770 - 60"
R77047 - 47"



Black
R103 - 60"
R10347 - 47"
R10398 - 98"



Specifications		
Fabric Type		
	100% Solution Dyed Acrylics	
Characteristics		
Finish	Fluorocarbon/Resin	
Standard Put-Ups	66 yards/60 meters	
Finished Widths	60" (Some colors available in 47" &/or 98")	
Finished Weight/sq yard	9 oz./305 gr./m2	
Styles	57 solids	
Limited Warranty	5 years	
Specifications	Test Method	Test Results
UV Resistance	AATCC-16	1,500+ hours
Abrasion	ASTM-4157	40,000 rubs
Hydrostatic	AATCC-127	40 cm
Puncture Strength	ASTM-751	38 lbs./17 kg
Tear Strength	ASTM-2261	Warp: 11.5 lbs. Fill: 7.7 lbs.
Tensile Strength	ASTM D-5034 Grab	Warp: 287 lbs. Fill: 149 lbs.
Shrinkage	Method 5804 100 hours	Warp: 0.1% Fill: 0%
Stretch	ASTM D-2594	Warp: 0% Fill: 0%

Limited Warranty:

A limited warranty of five years is guaranteed on S.A. Recasens Recacril® products. The warranty protects against the loss of characteristics, rot, mildew, and discoloration typical in normal atmospheric conditions. This warranty does not apply against any deterioration of any kind due to abusive use, accidental burns, negligence, vandalism, perforations, natural disasters or act of nature. Normal wear, weather soiling, or stains from environmental pollution or other source are not covered.

The product must be properly installed and maintained. The warranty, if applicable, does not cover labor, frames, systems or installation supplied by the dealer.

S.A. Recasens makes no fitness of warranty for any particular purposes whatsoever with respect to the goods being sold.

To obtain replacement fabric, call The Miami Corporation. Upon verification, The Miami Corporation will send a certified letter containing the appropriate information and facts to S.A. Recasens. S.A. Recasens agrees to replace, free of charge, the appropriate amount of the defective fabric with same fabric.

No warranties, expressed or implied, extend beyond the description on the face of this agreement.

Care and Cleaning:

Proper care and cleaning should be taken to ensure the life of Recacril® fabrics.

For regular care and maintenance, the excessive dirt should be brushed from the fabric using a soft brush. The fabric should then be sprayed with warm water (not exceeding 100°F/40°C) and air dried.

Periodically, the fabric should undergo a more thorough cleaning. Again, brush fabric with a soft bristled brush, spray with warm water, then apply a gentle **non-detergent** soap. Let stand for ten to twenty minutes, taking care to let it dry. Rinse thoroughly and air-dry. **DO NOT USE DETERGENTS.**

